

SMART Wi-Fi PT (Dual Lens) CAMERA

HX-SD31T31L5-W



Pan &
Tilt



Outdoor
IP66



Colorized Night
Vision



Alarm



Two Way
Audio






Micro SD
Storage

Product Feature

- 3MP+3MP, enjoy HD image.
- 2.8 inch Ball body, engineering plastic material, outdoor rainproof, stylish, beautiful and exquisite;
- Pan 350 °, Tilt 180 °, support 10 present position.
- WIFI connection, Scan the QR code to easily connect the camera to the network, simple and convenient operation.
- Comes with a hotspot connection, no network can also view and video playback.
- Support cloud storage and local TF card video storage, to ensure the safe storage of video data.
- Support MIC and speaker, Support two-way audio.
- Infrared white dual light design, support black and white and full color mode adjustable.
- Active defense, someone intruded into the guard area, human tracking, real-time pushing alarm information, equipment sound and light alarm.


SMART Wi-Fi PT (Dual Lens) CAMERA



Connect with Wi-Fi

WiFi version needs to connect WiFi signal to work, you can also connect AP hotspot without network.



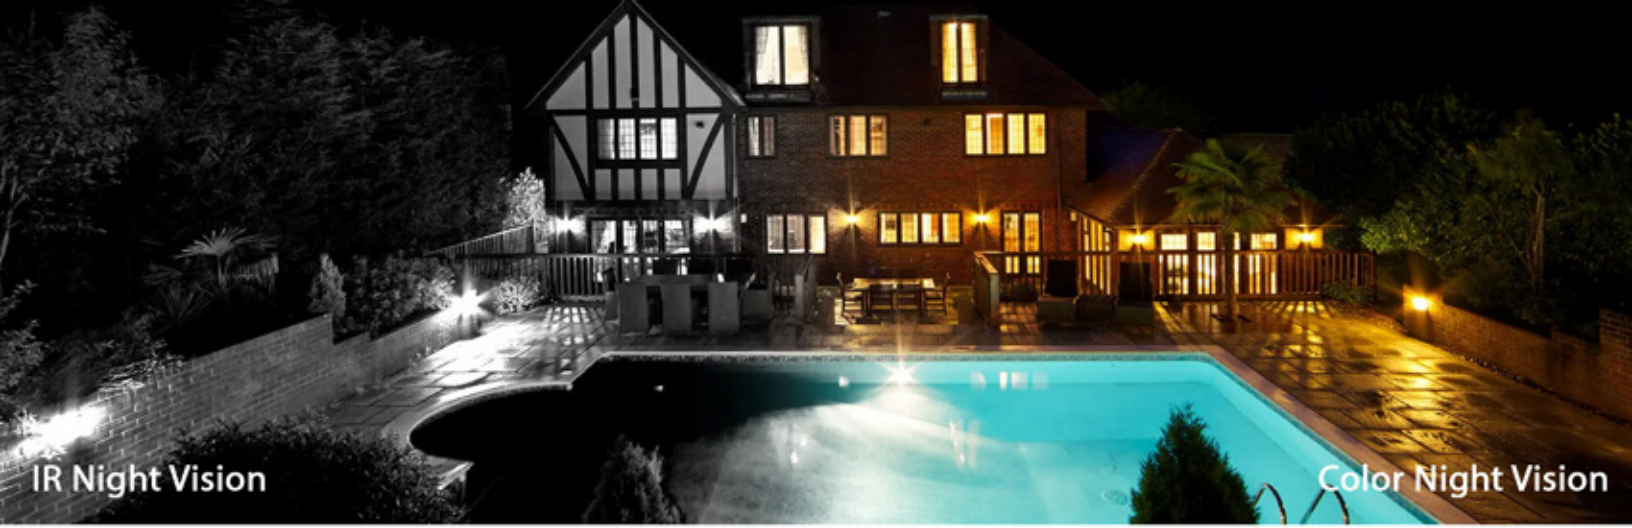


IR Night Vision

Color Night Vision



Ok, Sir.

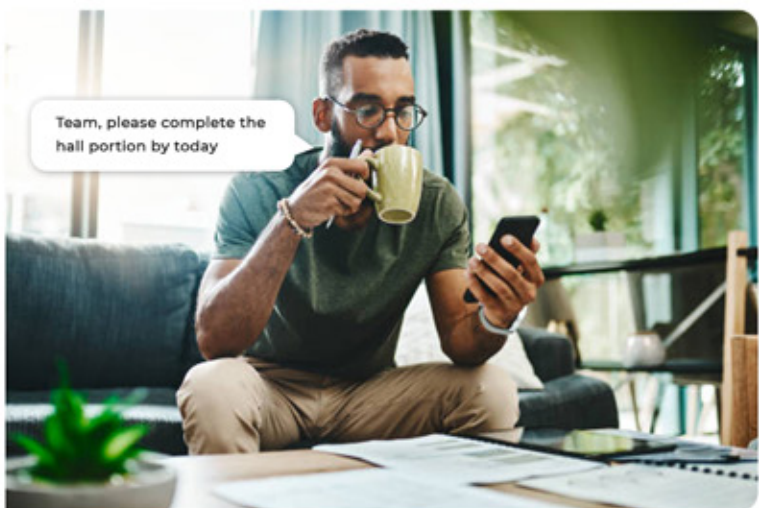

Team, please complete the hall portion by today



SMART LINKAGE ALARM AND TRACKING






**SPLIT VIEW FOR
MORE IN-DEPTH
IMAGE DETAILS**



Applications



Specification

Pixel	3MP + 3MP
Sensor	1/3" CMOS Sensor
Lens	Bullet 4mm fixed lens Dome PT 8mm fixed lens
Resolution	Main stream: 2304*1296; Sub stream : 640*360
Frame rate	Support 2D/3D DNR
Video code	H. 264/ H. 265, Support dual stream
Audio	G. 711, Support audio and video synchronizat ion
Storage	Support cloud storage, TF card storage (Up to 256G)
Audio function	Two—way audio
WIFI	802. 11b/g/n
Pan	Up to 350° 0.10 200 /Sec
Tilt	Up to 180° 0.10 200 /Sec
RJ45 network	10—100M adaptive
Internet Agreement	Support network protocols such as RTSP/DHCP/NTP
Support Aggrement	Support NI agreement
Minimum illumination	Color: 0. 1Lux, Balck and white 0. 01 Lux
IRLED	IR+ white light (Dome 18 double wick lights + bullet 6 double wick lights)
Fill light distance	IR 50M, white light 20M
Power supply	DC12V
Power consumption	<15W